

POMPA AD ANELLO LIQUIDO

Liquid ring vacuum pump






AD25gx – Cast Iron

AD25gx – Cast Iron

Pompa per vuoto ad anello liquido monostadio in esecuzione monoblocco, completa di valvola. Raggiunge i 33 mbar assoluti ed è adatta ad aspirare vapori e gas con tracce di liquidi. Non necessita lubrificazione. Disponibile la versione inox.

Monoblock single stage liquid ring vacuum pump with valve. It reaches 33 mbar abs. and it is suitable to suck vapors and gasses with liquid traces. No lubrication is required. Inox version available.

Prodotte in Italia da:

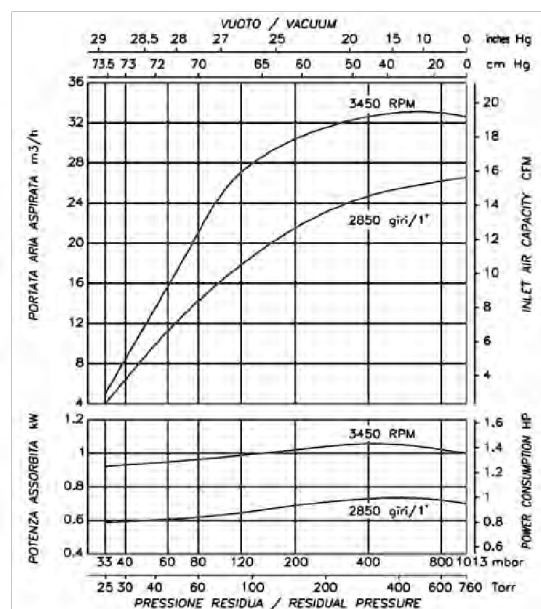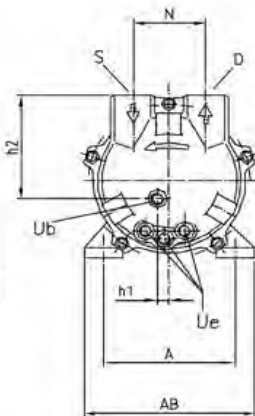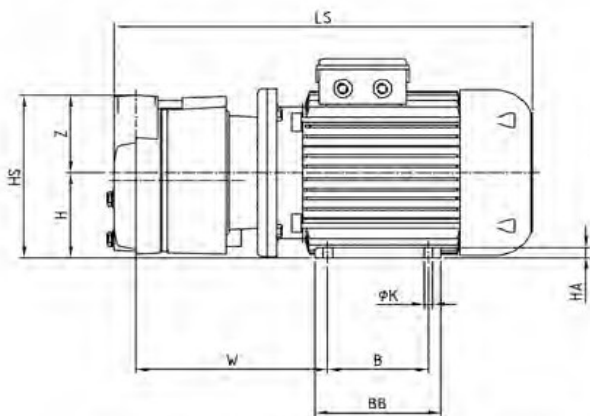

I valori di portata sono riferiti ad aria secca a 20°C, alla pressione atmosferica di mandata (1013 mbar) e all'impiego di acqua a 15°C. Tolleranza di prestazione + 10%. Nell'esecuzione in inox la portata diminuisce del 10%.

The given capacity values are referred to dry air at 20°C, atmospheric discharge pressure (1013 mbar) and of supply of service water at 15°C.

Performance tolerance + 10%. Stainless steel construction is 10% less performing.

MODELLO Model	FREQUENZA Frequency (Hz)		DATI MOTORE Motor information				PESO Weight (Kg)		S	1"	Aspirazione / Suction				
									D	1"	Mandata / Dishcharge				
									Ub	1/4"	Attacco liquido / Liquid connection				
									Ue	1/4"	Drenaggio pompa / Pump drain				
MODELLO Model	LS	W	A	AB	B	BB	K	HA	H	HS	N	Z	h1	h2	
AD25M 50hz	366	150	125	153	100	130	8	9,5	70	175	75	80	9,5	110	
AD25M 60hz	380	150	140	175	100	130	8	11	90	175	75	83	6	111	